



Patent
Attorney's Docket No. 003301-062

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of)	Mail Stop: Missing Parts
)	
GERT HANNER et al.)	Group Art Unit: (Unassigned)
)	
Application No.: 10/607,994)	Examiner: (Unassigned)
)	
Filed: June 30, 2003)	Confirmation No.: 8183
)	
For: RADIATION THERAPY DEVICE)	

SUBMISSION OF CERTIFIED COPY OF PRIORITY DOCUMENT

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

The benefit of the filing date of the following prior foreign patent application in the following foreign country is hereby requested, and the right of priority provided in 35 U.S.C. § 119 is hereby claimed:

Swedish Patent Application No. 0202106-1

Filed: July 5, 2002

In support of this claim, enclosed is a certified copy of said prior foreign patent application. Said prior foreign patent application is referred to in the oath or declaration. Acknowledgment of receipt of the certified copy is requested.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: December 2, 2003

By: Benton S. Duffett, Jr.
Benton S. Duffett, Jr.
Registration No. 22,030

P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

Intyg Certificate



Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Elekta AB, Stockholm SE
Applicant (s)

(21) Patentansökningsnummer 0202106-1
Patent application number

(86) Ingivningsdatum 2002-07-05
Date of filing

Stockholm, 2003-08-01

För Patent- och registreringsverket
For the Patent- and Registration Office

Dyveke Frimodt

Avgift
Fee 170:-

AWAPATENT AB

Kontor/Handläggare
Göteborg/Tommy Somlo

ELEKTA AB

Ansökningsnr

Vår referens
SE-2028200

1

RADIATION THERAPY DEVICETechnical Field

The present invention relates to a radiation therapy device of the type comprising a source carrier
5 arrangement carrying radioactive sources and a collimator body for directing radiation emanating from the sources toward a substantially common focus. The invention also relates to a method of changing the spatial dose distribution surrounding such a focus.

10

Background of the Invention

The development of surgical techniques have made great progress over the years. For instance, patients who need to be operated in the brain, can nowadays undergo
15 non-invasive surgery with very little trauma to the patient.

Leksell Gamma Knife® provides such surgery by means of gamma radiation. The radiation is emitted from fixed radioactive sources and are focused by means of
20 collimators, i.e. passages or channels for obtaining a beam of limited cross section, toward a defined target. Each of the sources provide only a small dose to intervening tissue, with the resulting maximum radiation dose available only at the common focus where the
25 radiation beams intersect. The target volume is determined, e.g. depending on the size of tumor to be radiated, by selecting different sizes of collimators. A type of collimator body called a "helmet", shaped like a hemisphere, is provided with collimators of one defined
30 size which at the target area or a site of focus provides a certain radiation beam diameter. If another beam diameter is desired, the helmet must be changed to another helmet having a suitable size of collimators.

Even though the radiation therapy can be successfully carried out with the above described equipment, it may be desirable to reduce the time which lapses during the changing of helmets.

5 US 5,757,886 discloses a medical radiating unit, in which a collimator carrier carries several sets of collimators of different aperture diameters distributed in correspondence with the distribution of radioactive sources in a source carrier. The collimator carrier and
10 the source carrier may be rotated relative to each other, thereby enabling a change from one set of collimators to another set of collimators. This eliminates the need to use several helmets in order to be able to change collimator sizes. However, it is still quite limited as
15 regards possibilities to choose different spatial dose distributions surrounding the focus. Furthermore, the issue of accessibility still remains to be solved. Another example is a whole-body radiotherapy device as disclosed in EP 1057499, which is also quite limited as
20 regards variation of spatial dose distribution.

Summary of the Invention

The object of the present invention is to provide a radiation therapy device and a method which alleviate the
25 drawbacks of the prior art devices.

This is accomplished by a radiation therapy device and a method as defined in the accompanied claims.

The invention is based on the understanding that it is possible to deviate from the known rotating devices
30 and still have the possibility of large variation as regards the spatial dose distribution surrounding a focus. It has unexpectedly been found that linear displacement not only provides the corresponding advantages of eliminating the need of a helmet, but also
35 provides several other advantages, such as for instance a variety of different dose gradients, as will be described in the following.

Thus, according to one aspect of the invention a radiation therapy device is provided. It comprises a a source carrier arrangement carrying radioactive sources. It also comprises a collimator body comprising
5 collimator passages, suitably in the form of long and narrow through holes, for directing radiation emanating from said sources toward a substantially common focus. Each collimator passage has an inlet for receiving said radiation. At least a subset of said sources are linearly
10 displaceable relatively to at least a subset of said collimator passage inlets, thereby enabling a change of spatial dose distribution surrounding said focus.

Analogously to the above aspect of the invention, according to another aspect of the present invention a
15 method of changing the spatial dose distribution surrounding the focus is provided. The method is characterized by linearly displacing at least a subset of said sources relatively to at least a subset of said collimator passage inlets.

20 Instead of being limited to a circular treatment space, which is the case when prior art rotational devices are used, the present invention allows for an arbitrary form of the treatment space to be chosen and still have an optimal radiation protection.

25 A radiation therapy device with the inventive linear motion also provides good operational liability. The linear motion allows the provision of reliable end positions, such as by mechanical means. Thus, the positioning of the sources in relation to the collimator
30 passage inlets is facilitated.

A linear displacement, i.e. a uniform motion in a straight line, of at least a subset of sources in relation to at least a subset of collimator inlets enables at least one or more, or even all, of said
35 sources to be shut off, i.e. not being in register with the collimator inlets.

The sources are arranged in a pattern on the source carrier arrangement, said pattern preferably corresponding to a pattern of at least one group or set of collimator passage inlets. Thus, the sources may be arranged in register with said set of collimator passage inlets so as to provide a desired spatial dose distribution, or they may be removed from that set of collimators to a complete shut-off position when none of the sources are in register with the collimator passage inlets. The linear displacement may even be made so that only some of the sources are in register with said inlets, while the other sources are shut off.

The collimator body may be provided with several groups or sets of collimator passages, each set being designed to provide a radiation beam of a respective specified cross-section toward the focus. Suitably the inlets of each set of collimator passage has a pattern that essentially corresponds to the pattern of the sources on the source carrier arrangement. These sets of collimator passage inlets may be arranged so that when the sources are linearly displaced it is possible to change from one set to another, thereby changing the resulting beam cross-section and the spatial dose distribution surrounding the focus. The number of sets of collimator passages with different diameter may be more than two, such as three or four, or even more.

The sets of collimator passage inlets may be arranged in the collimator body in various ways. For instance, each set may comprise a specific size of collimator passage arranged in a cluster and thus separately from the other sets. Alternatively, the collimator passage inlets of one set may be arranged in a scattered relationship with collimator passage inlets of the other sets. This second alternative, may for instance be implemented in the following way. Each set of collimator passage inlets comprises a number of rows of collimator passage inlets. For instance, if three sets

are provided in the collimator body, a row from a first set may have a row from a second set as its neighbour, said second set having a following row from a third set as a neighbour, which is followed by a row from the first set again. This alternating pattern means that the sources are suitably also arranged in a corresponding pattern of rows, the distance between two neighbouring rows of sources being equal to the distance between two spaced apart rows of collimator passage inlets from the same set. Thus, the distance between the rows of sources will in this case be about three times the distance between two consecutive rows of collimator passage inlets (having different passage cross-sections or diameters).

It is to be understood that a row of collimator inlets does not have to be completely straight, but the inlets in a row may e.g. be arranged in a zigzag pattern along a straight imaginary line in order to save space. For the same reason, this is also applicable to a row of sources.

Instead of having several sets of, preferably parallel, rows of collimator passage inlets, each set with different size of generated beam, it would also be conceivable to provide only one set, i.e. only one size of beam, with several rows of collimator passage. This too would enable a change of spatial dose distribution as will be described.

The sources, or at least a subset thereof, may be displaced in a direction substantially perpendicular to and intersecting said rows of collimator passage inlets. If several sets (different beam sizes) of collimator passages are provided, such a displacement would allow a change from one set to another set, thereby changing the beam sizes and thus the spatial dose distribution surrounding the focus. A further feature of such a motion, which may also be useful when only a single set (one beam size) of rows of collimator passages are provided, is when one or more rows of sources are

displaced past an end row of collimator passage inlets. This will result in one or more rows of sources being blocked or shut off while the rest of the rows of the sources will be in register with one or more rows of collimator passage inlets. This may be useful if a certain part of the patient is to be protected, for instance the eyes, or for any other reason when the dose gradient is to be changed.

It is to be understood that the linear displacement of the sources relatively to the collimator passage inlets may be accomplished by moving the sources while keeping the inlets still, or moving the inlets, i.e. at least a portion of the collimator body, while keeping the sources still, or by simultaneously or consecutively moving both the sources and the inlets. The linear displacement may be implemented by means of various actuator means.

The linear displacement may be performed in various directions. Linear displacement can be defined in the following way. First two coordinate systems, such as Cartesian coordinate systems, are defined, one for each object which is involved in the relative displacement. For instance, a subset of sources may be considered to be arranged in a first coordinate system, and a subset of collimator passage inlets may be considered to be arranged in a second coordinated system. When said objects (e.g. subsets) are displaced relatively to each other, while assuming that the respective coordinate systems follow the movement of the objects, i.e. each object will have an unchanged location and orientation in its own coordinate system, said displacement will be linear if the angle of the first coordinate system to the second coordinate system (or respective coordinate axes thereof) remains unchanged. In other words the coordinate systems can be regarded as performing a relative movement, carrying the objects along, without a change of angle. In contrast to a linear displacement, a rotational

displacement would result in a change of angle of the coordinate systems or a change of location or orientation of the objects in the coordinate system.

According to at least one embodiment of the invention the source carrier arrangement, and the collimator body has a cross-section of at least an arc of a circle, preferably an entire circle, the sources and the collimator body inlets being distributed circumferentially along the circle or the arc of a circle. The linear displacement may in such a case be performed in a direction substantially perpendicular to said cross-section, i.e. substantially parallel with the center axis of the circle or arc of the circle. The center axis may also be described as the z-axis in a cylindrical r -, ϕ -, z -coordinate system. The sources and the collimator passage inlets are in such a coordinate system distributed at least in the ϕ -direction (angular direction). The collimator passage inlets and sources are linearly displaceable relatively to each other in parallel to the z -axis (center axis). There may, however, be an inclination of the direction of displacement relatively to the center axis, as will be described later on.

The center axis may coincide with the z -axis in the Leksell x -, y -, z -coordinate system, which is a Cartesian coordinate system and in which the x -axis extends in parallel to a line drawn from one ear to the other ear of the patient, the y -axis extends in parallel to a line drawn from the neck to the nose of the patient, and the z -axis extends in parallel to the longitudinal direction of the patient's body. However, the patient may be tilted relatively to the center axis, wherein the linear displacement in the above described case may be defined in relation to said Leksell z -axis rather than the center axis. Thus, the linear displacement may be parallel with said Leksell z -axis, or somewhat inclined relatively to said Leksell z -axis. In case of an inclined linear

direction, that direction would preferably intersect the center axis or the Leksell z-axis, which may be the case when a somewhat conical source carrier arrangement is used, as will be described later on.

5 The cross-sections of the collimator body and the source carrier arrangement do not have to be circular, they could define a polygon, such as a rectangle, a pentagon, a hexagon, a heptagon, an octagon, etc. The sources could be displaceable, like in the examples
10 above, essentially perpendicularly to said cross-section, or they could be displaced tangentially, i.e. along a side of the polygon. It is to be understood that the collimator body and the source carrying arrangement may describe a part of a polygon, i.e. an open cross-section,
15 such as a hexagon cut in half.

 All the sources may be simultaneously displaced relatively to the collimator passage inlets. For instance, a ring shaped source carrier arrangement surrounding and being coaxial with a collimator body may
20 be displaced along the common center axis. However, the present invention also allows for a linear displacement of only some of the sources, i.e. a subset thereof, relatively to collimator passage inlets. This may be accomplished by linearly displacing only a portion of the
25 source carrier arrangement relatively to the collimator body, thereby causing said subset of sources to be displaced relatively to the collimator passage inlets, which results in a change of spatial dose distribution surrounding the focus.

30 According to at least one embodiment of the invention the source carrier arrangement comprises a number of segments, at least two or more, such as six, or even as many as sixty. Each segment carries a subset of said sources and is individually displaceable. Thus, the
35 previously mentioned portion of the source carrier arrangement may include one or more segments, and even the entire source carrier arrangement. For practical

reasons it is preferred to have the source carrier arrangement segmented as described. However, an alternative would be to provide the collimator body with individually movable segments, and another alternative
5 would be to provide both the collimator body and the source carrier arrangement with individually movable segments. In the following, however, only a segmented source carrier arrangement will be discussed.

Since the segments are individually displaceable and
10 controllable, it is e.g. possible to have one or more segments in register with inlets to collimator passages which direct toward the focus a radiation beam of a first cross-section or diameter, and simultaneously have one or more segments in register with inlets to collimator
15 passages which give a beam of a second cross-section or diameter. Furthermore, one or more segments may be completely or partly shut off, i.e. all or some of the sources are arranged between or beside the collimator passage inlets. It should be noted that any two segments
20 do not necessarily have to be displaceable in the same direction or parallel direction, but on the contrary each segment may be displaceable in its own linear direction. The segments are preferably displaceable along the envelope surface or lateral area of the collimator body,
25 wherein the sources are maintained at a substantially constant level relative to the collimator body, i.e. they are not lifted from the collimator body in this context.

One advantage of being able to shut off one or more segments, i.e. shielding the radiation sources in said
30 segments, while keeping the rest active, is that the dose gradient from that direction is thereby altered. Thus, it is possible to only radiate from a certain direction, thereby avoiding e.g. some critical structures in the patient's body to be unnecessarily exposed.

35 As has been previously mentioned the source carrier arrangement may have a somewhat conical shape. Thus, according to at least one embodiment of the present

invention at least a portion of the source carrier arrangement has an envelope surface or lateral area shaped substantially like a frustum of a cone. The patient's head or body may be introduced into the treatment space through the base of said cone. Source carrier arrangement segments may be placed in a ring circumferentially along the envelope surface. The segments may be displaceable e.g. on a sliding surface. Since the envelope surface is shaped like a frustum of a cone, the direction of motion of the segments is somewhat inclined relatively to the center axis of the source carrier arrangement, i.e. the motion follows the slant of the cone. A typical angle may be in the range of 0-45°, such as 5-25°, preferably 10-15°. The linear direction of motion being such that the segments, when moved away from the patient side, move closer towards the center axis. Even though it may be preferred to have a ring of segments that is only one segment wide, it would be conceivable to have more segments or rings of segments around the envelope surface. For instance, if a segment can be split into two segment parts, one part could be moved towards the base of the cone, while the other could be moved away from the base of the cone.

Suitably, each segment comprises or is connected to a respective actuator. Such an actuator may comprise an arm, shaft or an axle, including a driving means, such as mechanical, electrical, pneumatic, hydraulic, etc. The linear displacement of the segment is controlled by means of the actuator. The actuator itself could be designed to move in different ways. However, it may be practical to take advantage of a linear movement of an actuator arm, in case of which the direction of motion of the actuator arm would suitably be transmitted to the segment following in the same direction. For a source carrier arrangement having an envelope surface resembling to a cone or frustum of a cone the elongation of each actuator arm would form an angle and intersect with the center

axis. In case of a straight cylinder being the form of the source carrier arrangement the elongation of each actuator arm would run in parallel to the center axis.

From the above it should be clear that the present invention provides different alternatives for the design of a radiation therapy device. However, they all have in common the inventive linear or translational displacement. Such a linear displacement may be performed for a source carrier arrangement in the form of a single source body in one piece, or for a source carrier arrangement comprising several segments which may be partly connected to each other or completely separated from each other. Some embodiments will be further discussed in the following description of the drawings.

Brief description of the drawings

Fig. 1 is a perspective view of an assembly comprising a source carrier arrangement surrounding a collimator body, in accordance with an embodiment of the invention.

Fig. 2 is sectional view in perspective of the assembly shown in Fig. 1.

Fig. 3 is a view from the backside of the assembly shown in Fig. 1.

Fig. 4 is a view in cross-section along line IV-IV in Fig. 3.

Fig. 5 is a sectional view of an assembly of the type shown in Figs. 1-4, said assembly being illustrated with an actuating mechanism and a rear radiation protection structure.

Fig. 6 is a perspective view of an assembly comprising a source carrier arrangement surrounding a collimator body, in accordance with a second embodiment of the invention.

Fig. 7 is a sectional view in perspective of the assembly shown in Fig. 6.

Fig. 8 is a view from the backside of the assembly shown in Fig. 6.

Fig. 9 is a view in cross-section along line IX-IX in Fig. 8.

5 Fig. 10 is a perspective view of an assembly comprising a source carrier arrangement surrounding a collimator body, in accordance with a third embodiment of the invention.

10 Fig. 11 is sectional view in perspective of the assembly shown in Fig. 10.

Fig. 12 is a view from the backside of the assembly shown in Fig. 10.

Fig. 13 is a view in cross-section along line XIII-XIII in Fig. 12.

15 Fig. 14 is a perspective view, partly in cross-section, of an assembly comprising a source carrier arrangement surrounding a collimator body, in accordance with a fourth embodiment of the invention.

20 Fig. 15 illustrates the Leksell x-, y-, z-coordinate system.

Detailed description of the drawings

Fig. 1 is a perspective view of an assembly comprising a source carrier arrangement 2 surrounding a collimator body 4, in accordance with an embodiment of the invention. The source carrier arrangement 2 and the collimator body 4 both have the shape of a frustum of a cone. The source carrier arrangement 2 comprises six segments 6 distributed along the annular circumference of the collimator body 4. Each segment 6 has a plurality of apertures 8 into which containers containing radioactive sources, such as cobalt, are placed. The collimator body 4 is provided with collimator passages or channels, internal mouths 10 of said channels are shown in the figure.

25
30
35

Each segment 6 has two straight sides 12 and two curved sides 14a, 14b. One of the curved sides 14a forms

a longer arc of a circle, and is located near the base of the cone, while the other curved side 14b forms a shorter arc of a circle. The segments 6 are linearly displaceable, that is they are not rotated around the collimator body 4, but are instead movable back and forth along an imaginary line drawn from the center of the shorter curved side 14b to the center of the longer curved side 14a. Such a translation displacement has the effect of a transformation of coordinates in which the new axes are parallel to the old ones.

Due to the conical shape of the assembly, neighbouring segments are spaced apart by a gap, at least when being placed closest to the longer curved side 14a, so as to enable the linear displacement. The possible distance of motion for a segment is suitably set by two stop members (not shown), one at each curved side. In an end position, i.e. when the segment 6 is in contact with one of said stop members, the sources of said segment will be in a shut off state, which means that the sources are not in register with any collimator passage inlets.

A spring means (not shown) may be provided for each segment 6, said spring means striving to push the segment 6 toward one of the stop members. This is advantageous in case of a power failure, i.e. absence of current, in which case the spring means will push the segment 6 toward the stop member, thereby ensuring that the sources are not in register with any collimator passage inlet and the risk of radioactive leakage is minimized.

Furthermore one of the stop members may be used as a reference point or point of zero, from which the segment 6 is displaceable.

As can be seen from Fig. 1 there is a larger number of internal mouths 10 or holes of the collimator passages than the number of apertures 8 for receiving radioactive sources. In this particular case there are three times as many collimator passages as there are apertures for receiving radioactive sources, such as e.g. 180 apertures

and 540 collimator passages. The reason for this is that there are three different sizes of collimator passages in the collimator body 4, or rather passages which direct radiation beams with three different diameters, toward the focus. Said diameters may e.g. be 4, 8 and 14 mm. The three different types of collimator passages are each arranged in a pattern which corresponds to the pattern of the apertures in the source carrier arrangement. The desired size or type of collimator passage is selected by displacing the segments 6 of the source carrier arrangement linearly along the collimator body so as to be in register with the desired collimator passages.

Fig. 2 is sectional view in perspective of the assembly shown in Fig. 1. The same reference numerals are used for details which are the same as in Fig. 1. This also applies to the following Figs. 3 and 4.

Fig. 3 is a view from the backside of the assembly shown in Fig. 1. This is the side with smaller diameter, while the other side, having a larger diameter, is the front or patient side, i.e. where the patient's body is introduced.

Fig. 4 is a view in cross-section along line IV-IV in Fig. 3. Thus, in Fig. 4 two segments 6a and 6b are shown. Starting with one of the segments 6a, in this view it can be seen that there are nine collimator passages 18a-18c available for three radioactive sources 9 contained in a respective aperture 8 in the source carrier arrangement. The sizes of the collimators 18a-18c are arranged in an alternating sequence, such as for instance, the first collimator passage 18a providing a beam of 14 mm in diameter, the second collimator passage 18b providing a beam of 8 mm in diameter, the third collimator passage 18c providing a beam of 4 mm in diameter, the fourth collimator passage 18a starting the sequence all over by providing a beam of 14 mm in diameter, etc. In the figure the apertures 8 of the source carrier arrangement are arranged in register with

the second, fifth and eighth collimator passages 18b, or rather their respective inlets, said collimator passages all providing a beam of 8 mm in diameter at the focus. Each segment may be individually displaced in a straight direction as is illustrated with the double-headed arrow in order to select another group of collimator passages, i.e. another beam diameter size for any segment. If the segment is displaced so that the radioactive sources 9 face a surface in between the collimator passages, those radioactive sources will be shut off, i.e. essentially no or only a minimum radiation from those sources will reach the focus. A segment may also like the segment 6b in Fig. 4 be displaced to such an extent that one of the three shown apertures will be located beside and outside of the first or ninth collimator passage. This allows of the possibility to arrange only two of the three radiation sources 9 in register with two collimator passages. Thus, this and other embodiments do not only enable that differently sized beams are simultaneously directed from different directions toward a common focus, but also that different numbers of beams may simultaneously be directed from different directions.

As can be seen in Fig. 4 the nine collimator passages 18a-18c are arranged at somewhat different angles in order for the beams to be directed to the common focus, regardless of which collimator passage or passages that are used at the moment. The angle of extension direction of the first to the last collimator passage having the same cross-section is, in this case, at least 30°.

An advantage of the conicity of embodiments such as the one illustrated in Figs. 1-4 is that the solid angle of the sources is spread out. The beams passing through the patient's tissue on their way towards focus will be evenly distributed. Furthermore, each source will have substantially the same distance to the focus, which is advantageous since the intensity of the source is

reversibly proportional to the square of the distance between the radioactive source and the focus.

Another advantage of this and other embodiments of the invention is that the fixed collimator body 4, even
5 though having a multiplicity of fixed collimator passages, still enables a complete or merely a partial shut off of the radioactive sources.

Fig. 5 is a sectional view of an assembly of the type shown in Figs. 1-4, said assembly being illustrated
10 with an actuating mechanism and a rear radiation protection structure. Accordingly, a source carrier arrangement having a plurality of segments 24 is provided. Each segment 24 has a number of apertures 28 in which sources are inserted. The segments 24 are arranged
15 around a collimator body 26 having collimator passages with mouths 30 directing radiation beams towards a focus.

The segments are surrounded by a rear radiation protection structure 32, so as to minimize or eliminate leakage of radiation to the nursing personnel. The rear
20 protection structure 32 is dimensioned and made of a suitable material, such as casting material, accordingly. A front radiation protection structure (not shown) is suitably also provided, preferably of smaller dimension so as to facilitate access to the treatment space, but
25 with a high density material, such as lead, tungsten or depleted uranium.

An actuating mechanism is provided for displacing the segments in a linear direction of motion. The maximum displacement distance for a segment may e.g. be 50 mm,
30 however larger or smaller distances are also conceivable. The actuating mechanism comprises a number of supporting rods or arms 34, each arm being connected to a respective segment 24. The arms 34 extend through a respective bore in the rear radiation protection structure 32 and are
35 movable along their direction of elongation. The arm and the bore are designed so as to form a labyrinth passage having different portions of overlapping diameters,

thereby minimizing or eliminating the escape of hazardous radiation through the bore. Each arm is individually controlled by means of a respective rotational electrical motor. The electrical motor has a high resolution with a positioning coder and a ball roller screw enabling a precise linear positioning of the arm 34 and the segment 24. A spring means 35 is arranged to affect the arms and ensure that they displace the segments so that the radioactive sources will be in a complete shut-off position in case of power failure. The arms 34 may be disconnected from the segments 24, when the segments are to be provided with new radioactive sources. In such case the loading is suitably done through channels (not shown) provided in one area of in the rear radiation protection structure 32. The loading procedure may be performed in a conventional manner as in the prior art, e.g. a procedure corresponding to the one used in connection with Leksell Gamma Knife®. However, alternative procedures are also conceivable.

Figs. 6-9 illustrate, in views corresponding to Figs. 1-4, respectively, an assembly comprising a source carrier arrangement 42 surrounding a collimator body 44, in accordance with a second embodiment of the invention. As can be seen in Figs. 6-9, the collimator body 44 has the shape of a straight circular cylinder. The surrounding source carrier arrangement 42 is provided as a single unit in the form of a source body and has similarly the shape of a straight circular cylinder. However, it is to be understood that this cylindrical form of source carrier arrangement 42 may alternatively be designed with segments just like the previously shown conical embodiment. It can be noted that the section in Fig. 7 is taken through a portion of the collimator body comprising collimator passages 46. These collimator passages are also shown in Fig. 9 which is a sectional view along line IX-IX in Fig. 8. Due to the three different sizes of collimator passages they are denoted

46a, 46b, 46c and are arranged in alternating series like the collimator passages previously shown in Fig. 4. Also the source carrier arrangement, which is movable as indicated by the double arrow, has in the shown section
5 three apertures 48 for radioactive sources. The source carrier arrangement is positioned so that the apertures 48 are in register with inlets 50 to the smallest diameter collimator passages 46c.

Figs. 10-13 illustrate, in views corresponding to
10 Figs. 1-4, respectively, an assembly comprising a source carrier arrangement 62 surrounding a collimator body 64, in accordance with a third embodiment of the invention. As can be seen from Figs. 10-13 the source carrier arrangement 62 comprises four segments 66. The collimator
15 body 64 has the form of a stepped cylinder, i.e. it comprises concentric portions of different diameters, the largest diameter being at the patient or front side and the smallest diameter being on the backside. In the particular embodiment shown in Figs 10-13 the collimator
20 body has three step portions 68a-68c. The first step portion 68a is nearest the patient side and has the largest outer diameter, said outer diameter being defined by a first sliding surface 70a. The second step portion 68b is located adjacent to the first step portion 68a and
25 has a somewhat smaller outer diameter. Due to the difference in outer diameter a circular first shoulder 72 is defined on the first step portion 68a, said first shoulder 72 being in one piece with a thereto perpendicular second sliding surface 70b of the second
30 step portion 68b. Similarly a third step portion 68c is located adjacent to the second step portion 68b with an even smaller outer diameter defined by a third sliding surface 70c which is perpendicular to a second shoulder 74 defined on the second step portion 68b.

35 In a cross section (se e.g. Fig. 13) the first, second and third step portion each have three collimator passages inlets leading to collimator passages 76a-76c

which direct radiation beams toward a substantially common focus. Furthermore, in each step portion 68a-c the three collimator passages 76a-76c are of different diameters.

5 The source carrier arrangement 62 comprises four segments 66, each segment 66 carrying a number of sources. As can be seen from e.g. Fig. 13 in a cross section a segment 66 of the source carrier arrangement has three sliding surfaces which mate the sliding
10 surfaces 70a-70c of the collimator body. Each sliding surface of a segment 66 comprises in the shown cross-section a radioactive source aperture 78 which is placeable in register with one of the collimator passage inlets on the corresponding sliding surface of a
15 collimator step portion 68a-68c. The first and second shoulder 72, 74 on the first and second step portion 68a, 68b, respectively, of the collimator body 64 function as stop faces against corresponding areas 80 of the segments 66 of the source carrier arrangement, and thereby
20 defining an end position to which it is possible to displace the segments. A double arrow indicates the direction of displacement.

It is to be noted that this, as well as any other embodiment, may suitably be provided with slide bearings
25 in order to facilitate the displacement of the source carrier arrangement by sliding on the collimator body. In this connection should also be noted that the present invention allows the radioactive sources to be placed close to and almost in contact with the inlets of the
30 collimator passages.

Fig. 14 is a perspective view, partly in cross-section, of an assembly comprising a source carrier arrangement surrounding a collimator body 94, in accordance with a fourth embodiment of the invention. The
35 collimator body 94 has the shape of a hexagonal cylinder. Thus, the envelope surface of the collimator body 94 has six faces 96.

This embodiment has two clear differences compared to the previously shown embodiments. One difference is that the source carrier arrangement surrounding the collimator body comprises six clearly separate segments 98. The previous embodiments were also illustrated with individual segments, however they still appeared to form a rather united geometrical figure, while in this embodiment there is less unity and it is the imaginary extensions of the segments 98 that form a geometric figure, i.e. a hexagon.

A second difference of the embodiment shown in Fig. 14 compared with the previously shown figures is that the segments 98 are linearly displaceable in a tangential direction, i.e. perpendicularly to the central axis of the hexagonal assembly. A respective segment 98 which carries sources 100 is displaceably provided on each one of the six faces 96 of the collimator body 94. Thus, each segment 98 may be moved on the corresponding specific face 96 of the collimator body 94 in a direction from one neighbouring face to the other neighbouring face of said specific face. As is illustrated in this figure, the movement of a segment may be affected by means of an actuator 102 comprising a threaded arm 104 which extends into a correspondingly threaded bore (not shown) in the segment 98. By rotating the arm 104 clockwise the segment 98 will be displaced in one direction, and by rotating the arm 104 anticlockwise the segment 98 will be displaced in the opposite direction.

Fig. 15 illustrates the Leksell x-, y-, z-coordinate system, which is a Cartesian coordinate system, in connection with a standard frame being applied around the patient's head. As can be seen in the figure the origin of coordinates (0,0,0) is located behind the back of the patient's head, outside the right ear and over the top of the patient's head. Thus, any target area or focus in the patient's head will be defined by positive coordinates. The x-axis extends in parallel to an imaginary line

21

extending from the right ear to the left ear of the
patient. The y-axis extends in parallel to a line drawn
from the neck (posterior) to the nose (anterior) of the
patient. The z-axis extends in parallel to the
5 longitudinal direction of the patient's body.

10

7
1
2
3
4
5
6
7
8
9
0

CLAIMS

1. A radiation therapy device, comprising
a source carrier arrangement carrying radioactive
5 sources;
a collimator body comprising collimator passages for
directing radiation emanating from said sources toward a
substantially common focus, each collimator passage
having an inlet for receiving said radiation;
10 c h a r a c t e r i z e d in that at least a subset of
said sources is linearly displaceable relatively to at
least a subset of said collimator passage inlets, or vice
versa, thereby enabling a change of spatial dose
distribution surrounding said focus.
15
2. The radiation therapy device as claimed in claim
1, wherein said collimator body and at least a portion of
said source carrier arrangement are linearly displaceable
relatively to each other so as to cause the positions of
20 said subset of sources and the positions of said subset
of inlets to be displaced relatively to each other.
3. The radiation therapy device as claimed in claim
1 or 2, wherein said source carrier arrangement comprises
25 at least two segments, each segment carrying a subset of
said sources and being individually linearly
displaceable.
4. The radiation therapy device as claimed in claim
30 3, wherein each subset comprises at least one row of
sources which are jointly placeable in register with
collimator passage inlets aligned in a corresponding row,
and which are jointly removable from said inlets, by
displacement of a segment.
35
5. The radiation therapy device as claimed in claim
4, wherein said collimator body comprises several

parallel rows of collimator passage inlets, at least one of said rows being associated with collimator passages that direct toward said focus radiation beams of a different cross-section than radiation beams directed by
5 collimator passages associated with the other rows.

6. The radiation therapy device as claimed in claim 5, wherein each segment is displaceable in a direction substantially perpendicular to and intersecting said rows
10 of collimator passage inlets.

7. The radiation therapy device as claimed in claim 6, wherein said collimator body comprises:

a first set of rows of collimator passage inlets
15 associated with collimator passages that provide radiation beams of a first cross-section;

a second set of rows of collimator passage inlets associated with collimator passages that provide radiation beams of a second cross-section; and preferably

20 at least a third set of rows of collimator passage inlets associated with collimator passages that provide radiation beams of a third cross-section;

wherein any row from one of said sets has, as its closest neighbour, a row from at least one of the other
25 sets.

8. The radiation therapy device as claimed in claim 7, wherein said subset comprises a plurality of rows of sources which are arranged to be simultaneously placeable
30 in register with collimator passage inlets from one of said sets, said plurality of rows of sources being simultaneously displaceable so that the sources of at least one of said rows of sources avoid being in register with collimator passage inlets.

35

9. The radiation therapy device as claimed in any one of claims 1-8, wherein each one of said source

carrier arrangement and said collimator body has a cross-section of at least an arc of a circle, preferably an entire circle, along which said sources and said collimator passage inlets are distributed, wherein said subset of collimator passage inlets and said subset of sources are linearly displaceable relatively to each other in a direction substantially perpendicular to said cross-section.

10 10. The radiation therapy device as claimed in any one of claims 1-9, wherein, in a Leksell x-,y-,z-coordinate system, said subset of collimator passage inlets and said subset of sources are linearly displaceable relatively to each other essentially in parallel to the z-axis.

11. The radiation therapy device as claimed in any one of claims 1-9, wherein at least a portion of said source carrier arrangement has an envelope surface shaped substantially like a frustum of a cone.

12. The radiation therapy device as claimed in claim 11, wherein, in a Leksell x-,y-,z-coordinate system, said subset of sources are linearly displaceable at an angle of 0-45°, such as 5-25°, preferably 10-15° to the z-axis.

13. The radiation therapy device as claimed in claim 3 or any one of claims 4 - 12 in combination with claim 3, wherein each segment comprises or is connected to a respective actuator, preferably comprising an arm, for controlling the displacement of the segment, wherein the direction of displacement is preferably along the longitudinal axis of the actuator.

14. A method of changing the spatial dose distribution surrounding a focus toward which collimator passages direct radiation emanating from radioactive

sources carried by a source carrier arrangement of a radiation therapy device, each collimator passage having an inlet for receiving said radiation, characterized by linearly displacing at least a subset of said sources relatively to at least a subset of said collimator passage inlets, or vice versa.

15. The method as claimed in claim 14, comprising linearly displacing at least a portion of said source carrier arrangement relatively to a collimator body having said collimator passages, thereby causing said subset of sources to be displaced relatively to said subset of collimator passage inlets.

16. The method as claimed in claim 15, comprising displacing said portion so that the sources are moved from a position in which they are in register with collimator passage inlets to a position in which they are not in register with collimator passage inlets.

17. The method as claimed in claim 15, comprising displacing said portion so that the sources are moved from a position in which they are in register with inlets to collimator passages of a first size to a position in which they are in register with inlets to collimator passages of a second size.

18. The method as claimed in any one of claims 14 - 17, wherein the sources are displaced essentially in parallel to the z-axis in a Leksell x-,y-,z-coordinate system.

19. The method as claimed in any one of claims 14 - 17, wherein the sources are displaced in a direction having an angle of 0-45°, such as 5-25°, preferably 10-15°, relatively to the z-axis in a Leksell x-,y-,z-coordinat system.

Abstract

A radiation therapy device and a method of changing the spatial dose distribution surrounding a focus are disclosed. At least a subset of the radioactive sources
 5 in a source carrier is linearly displaceable relatively to at least a subset of collimator passage inlets, or vice versa.

(Fig. 4)

10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525
 526
 527
 528
 529
 530
 531
 532
 533
 534
 535
 536
 537
 538
 539
 540
 541
 542
 543
 544
 545
 546
 547
 548
 549
 550
 551
 552
 553
 554
 555
 556
 557
 558
 559
 560
 561
 562
 563
 564
 565
 566
 567
 568
 569
 570
 571
 572
 573
 574
 575
 576
 577
 578
 579
 580
 581
 582
 583
 584
 585
 586
 587
 588
 589
 590
 591
 592
 593
 594
 595
 596
 597
 598
 599
 600
 601
 602
 603
 604
 605
 606
 607
 608
 609
 610
 611
 612
 613
 614
 615
 616
 617
 618
 619
 620
 621
 622
 623
 624
 625
 626
 627
 628
 629
 630
 631
 632
 633
 634
 635
 636
 637
 638
 639
 640
 641
 642
 643
 644
 645
 646
 647
 648
 649
 650
 651
 652
 653
 654
 655
 656
 657
 658
 659
 660
 661
 662
 663
 664
 665
 666
 667
 668
 669
 670
 671
 672
 673
 674
 675
 676
 677
 678
 679
 680
 681
 682
 683
 684
 685
 686
 687
 688
 689
 690
 691
 692
 693
 694
 695
 696
 697
 698
 699
 700
 701
 702
 703
 704
 705
 706
 707
 708
 709
 710
 711
 712
 713
 714
 715
 716
 717
 718
 719
 720
 721
 722
 723
 724
 725
 726
 727
 728
 729
 730
 731
 732
 733
 734
 735
 736
 737
 738
 739
 740
 741
 742
 743
 744
 745
 746
 747
 748
 749
 750
 751
 752
 753
 754
 755
 756
 757
 758
 759
 760
 761
 762
 763
 764
 765
 766
 767
 768
 769
 770
 771
 772
 773
 774
 775
 776
 777
 778
 779
 780
 781
 782
 783
 784
 785
 786
 787
 788
 789
 790
 791
 792
 793
 794
 795
 796
 797
 798
 799
 800
 801
 802
 803
 804
 805
 806
 807
 808
 809
 810
 811
 812
 813
 814
 815
 816
 817
 818
 819
 820
 821
 822
 823
 824
 825
 826
 827
 828
 829
 830
 831
 832
 833
 834
 835
 836
 837
 838
 839
 840
 841
 842
 843
 844
 845
 846
 847
 848
 849
 850
 851
 852
 853
 854
 855
 856
 857
 858
 859
 860
 861
 862
 863
 864
 865
 866
 867
 868
 869
 870
 871
 872
 873
 874
 875
 876
 877
 878
 879
 880
 881
 882
 883
 884
 885
 886
 887
 888
 889
 890
 891
 892
 893
 894
 895
 896
 897
 898
 899
 900
 901
 902
 903
 904
 905
 906
 907
 908
 909
 910
 911
 912
 913
 914
 915
 916
 917
 918
 919
 920
 921
 922
 923
 924
 925
 926
 927
 928
 929
 930
 931
 932
 933
 934
 935
 936
 937
 938
 939
 940
 941
 942
 943
 944
 945
 946
 947
 948
 949
 950
 951
 952
 953
 954
 955
 956
 957
 958
 959
 960
 961
 962
 963
 964
 965
 966
 967
 968
 969
 970
 971
 972
 973
 974
 975
 976
 977
 978
 979
 980
 981
 982
 983
 984
 985
 986
 987
 988
 989
 990
 991
 992
 993
 994
 995
 996
 997
 998
 999
 1000
 1001
 1002
 1003
 1004
 1005
 1006
 1007
 1008
 1009
 1010
 1011
 1012
 1013
 1014
 1015
 1016
 1017
 1018
 1019
 1020
 1021
 1022
 1023
 1024
 1025
 1026
 1027
 1028
 1029
 1030
 1031
 1032
 1033
 1034
 1035
 1036
 1037
 1038
 1039
 1040
 1041
 1042
 1043
 1044
 1045
 1046
 1047
 1048
 1049
 1050
 1051
 1052
 1053
 1054
 1055
 1056
 1057
 1058
 1059
 1060
 1061
 1062
 1063
 1064
 1065
 1066
 1067
 1068
 1069
 1070
 1071
 1072
 1073
 1074
 1075
 1076
 1077
 1078
 1079
 1080
 1081
 1082
 1083
 1084
 1085
 1086
 1087
 1088
 1089
 1090
 1091
 1092
 1093
 1094
 1095
 1096
 1097
 1098
 1099
 1100
 1101
 1102
 1103
 1104
 1105
 1106
 1107
 1108
 1109
 1110
 1111
 1112
 1113
 1114
 1115
 1116
 1117
 1118
 1119
 1120
 1121
 1122
 1123
 1124
 1125
 1126
 1127
 1128
 1129
 1130
 1131
 1132
 1133
 1134
 1135
 1136
 1137
 1138
 1139
 1140
 1141
 1142
 1143
 1144
 1145
 1146
 1147
 1148
 1149
 1150
 1151
 1152
 1153
 1154
 1155
 1156
 1157
 1158
 1159
 1160
 1161
 1162
 1163
 1164
 1165
 1166
 1167
 1168
 1169
 1170
 1171
 1172
 1173
 1174
 1175
 1176
 1177
 1178
 1179
 1180
 1181
 1182
 1183
 1184
 1185
 1186
 1187
 1188
 1189
 1190
 1191
 1192
 1193
 1194
 1195
 1196
 1197
 1198
 1199
 1200
 1201
 1202
 1203
 1204
 1205
 1206
 1207
 1208
 1209
 1210
 1211
 1212
 1213
 1214
 1215
 1216
 1217
 1218
 1219
 1220
 1221
 1222
 1223
 1224
 1225
 1226
 1227
 1228
 1229
 1230
 1231
 1232
 1233
 1234
 1235
 1236
 1237
 1238
 1239
 1240
 1241
 1242
 1243
 1244
 1245
 1246
 1247
 1248
 1249
 1250
 1251
 1252
 1253
 1254
 1255
 1256
 1257
 1258
 1259
 1260
 1261
 1262
 1263
 1264
 1265
 1266
 1267
 1268
 1269
 1270
 1271
 1272
 1273
 1274
 1275
 1276
 1277
 1278
 1279
 1280
 1281
 1282
 1283
 1284
 1285
 1286
 1287
 1288
 1289
 1290
 1291
 1292
 1293
 1294
 1295
 1296
 1297
 1298
 1299
 1300
 1301
 1302
 1303
 1304
 1305
 1306
 1307
 1308
 1309
 1310
 1311
 1312
 1313
 1314
 1315
 1316
 1317
 1318
 1319
 1320
 1321
 1322
 1323
 1324
 1325
 1326
 1327
 1328
 1329
 1330
 1331
 1332
 1333
 1334
 1335
 1336
 1337
 1338
 1339
 1340
 1341
 1342
 1343
 1344
 1345
 1346
 1347
 1348
 1349
 1350
 1351
 1352
 1353
 1354
 1355
 1356
 1357
 1358
 1359
 1360
 1361
 1362
 1363
 1364
 1365
 1366
 1367
 1368
 1369
 1370
 1371
 1372
 1373
 1374
 1375
 1376
 1377
 1378
 1379
 1380
 1381
 1382
 1383
 1384
 1385
 1386
 1387
 1388
 1389
 1390
 1391
 1392
 1393
 1394
 1395
 1396
 1397
 1398
 1399
 1400
 1401
 1402
 1403
 1404
 1405
 1406
 1407
 1408
 1409
 1410
 1411
 1412
 1413
 1414
 1415
 1416
 1417
 1418
 1419
 1420
 1421
 1422
 1423
 1424
 1425
 1426
 1427
 1428
 1429
 1430
 1431
 1432
 1433
 1434
 1435
 1436
 1437
 1438
 1439
 1440
 1441
 1442
 1443
 1444
 1445
 1446
 1447
 1448
 1449
 1450
 1451
 1452
 1453
 1454
 1455
 1456
 1457
 1458
 1459
 1460
 1461
 1462
 1463
 1464
 1465
 1466
 1467
 1468
 146

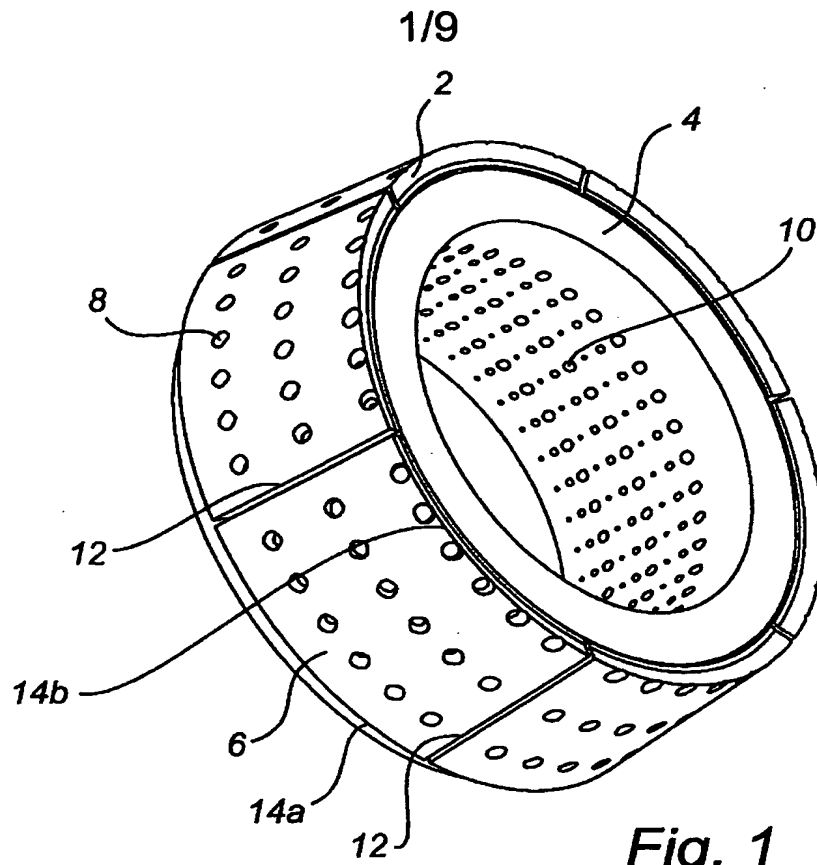


Fig. 1



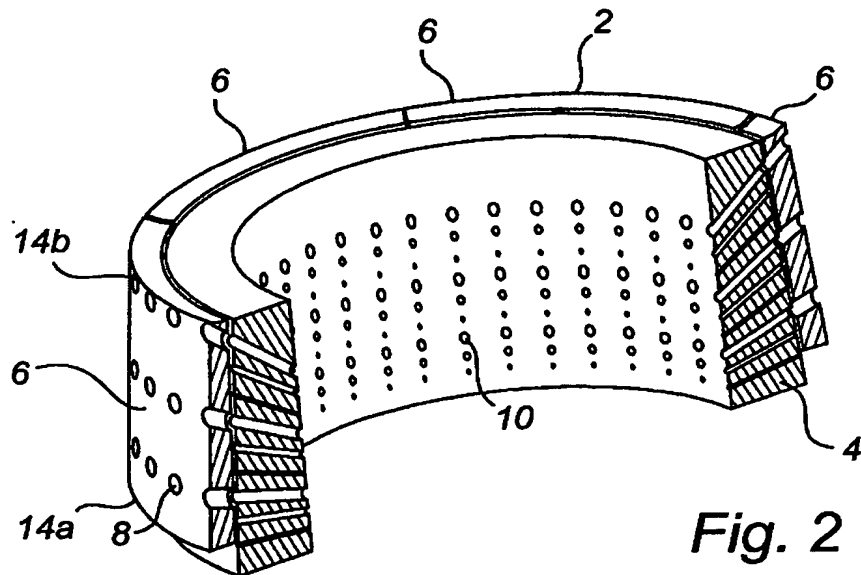


Fig. 2

2/9

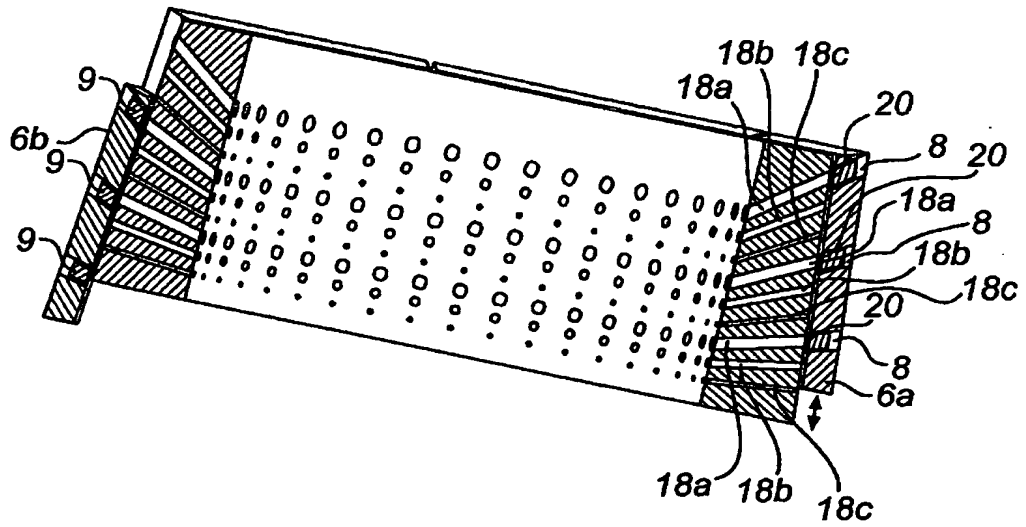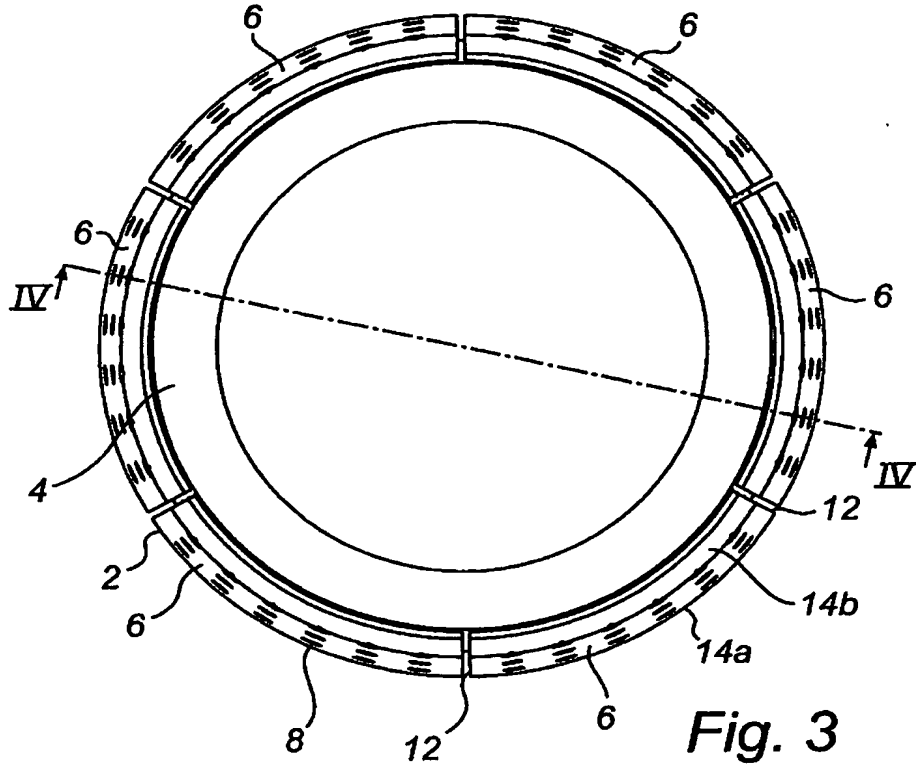

3/9

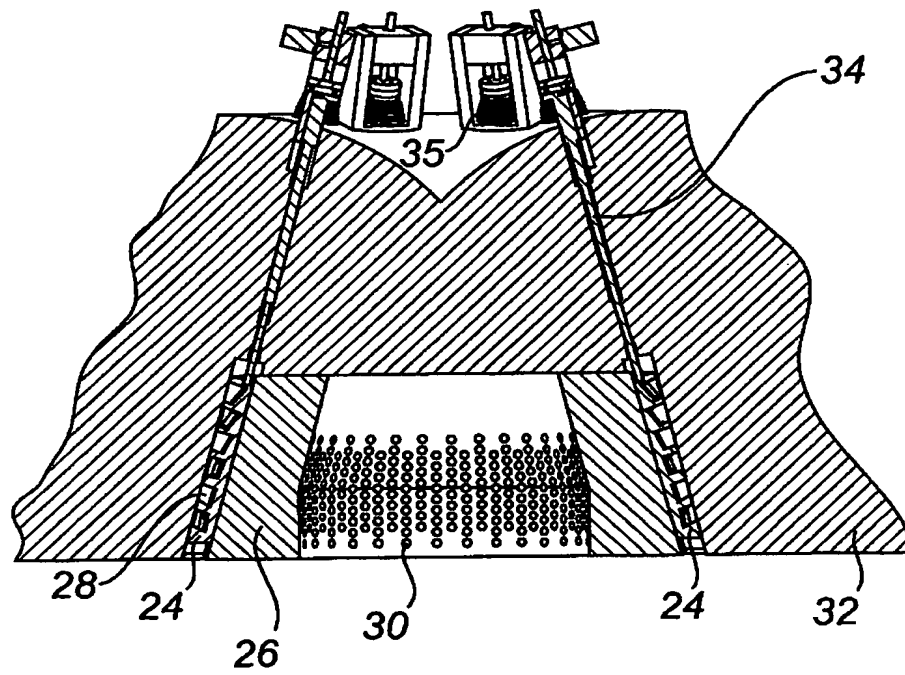


Fig. 5

03031061

4/9

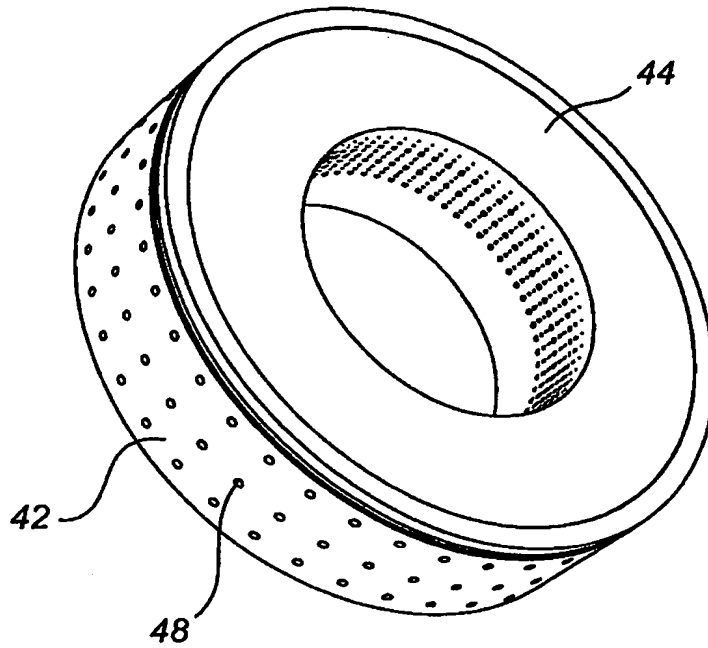


Fig. 6

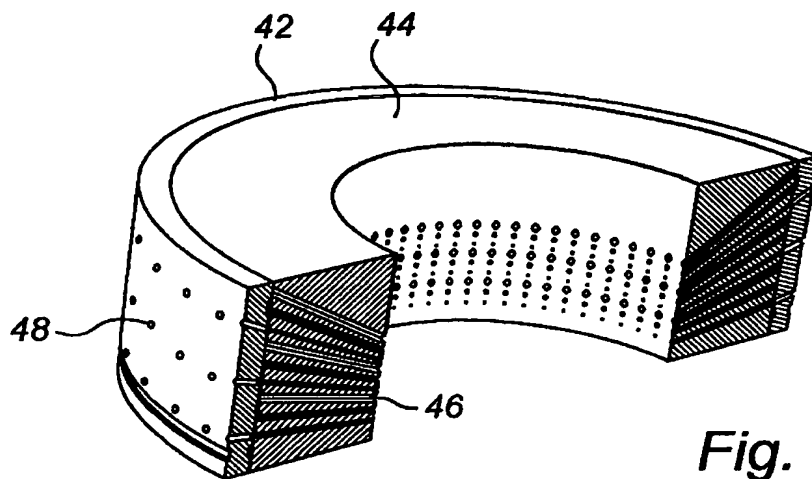


Fig. 7

5/9

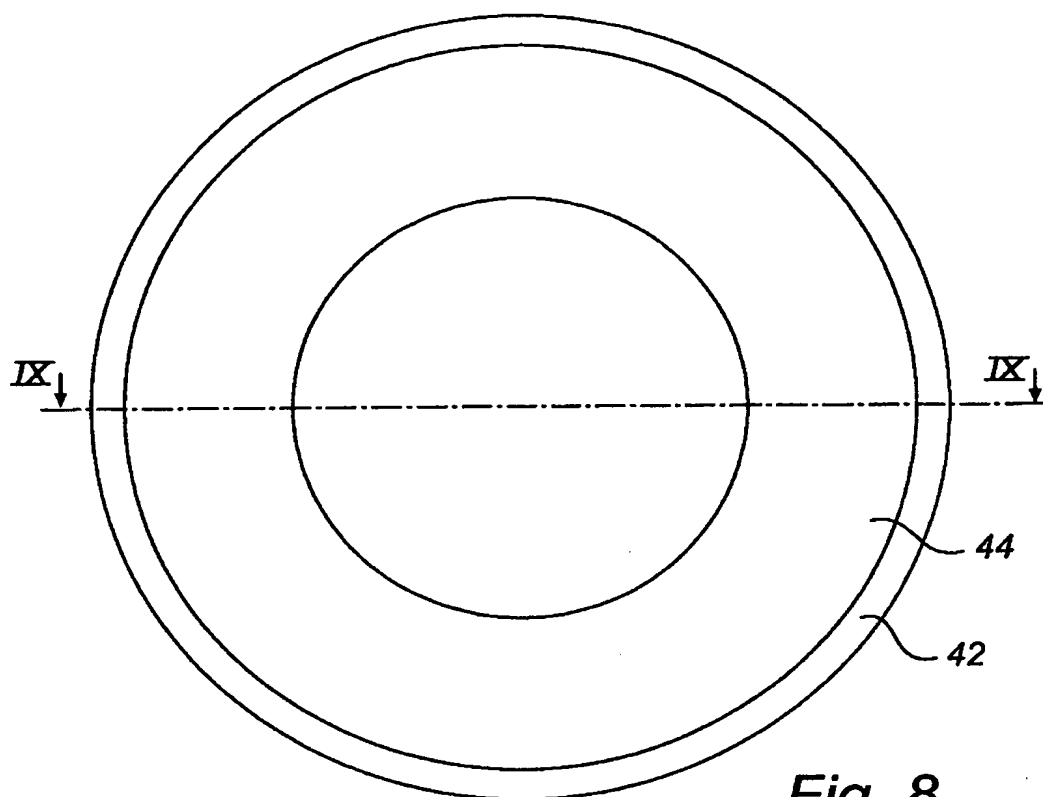


Fig. 8

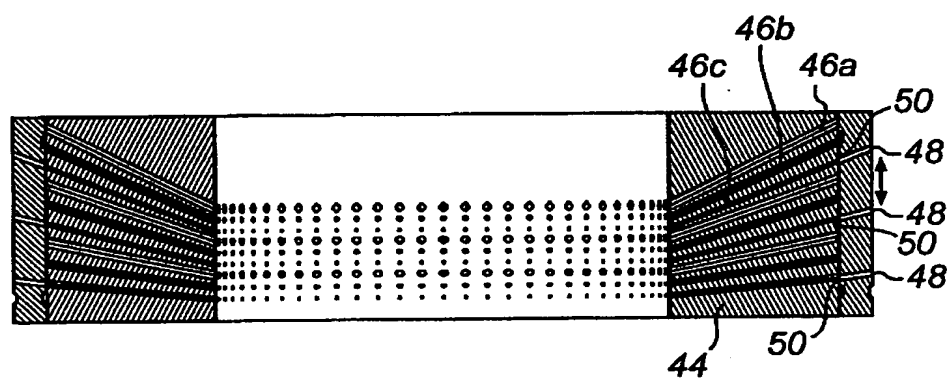


Fig. 9

6/9

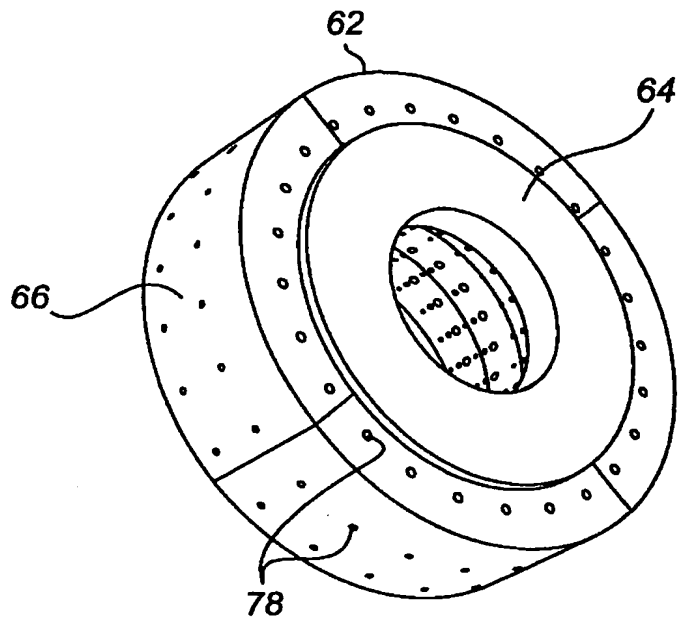


Fig. 10

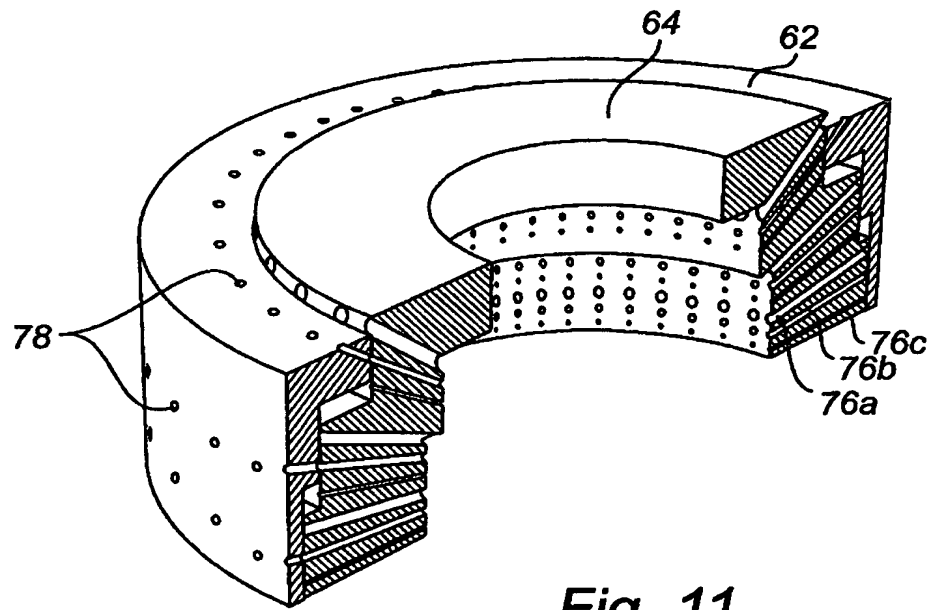


Fig. 11

7/9

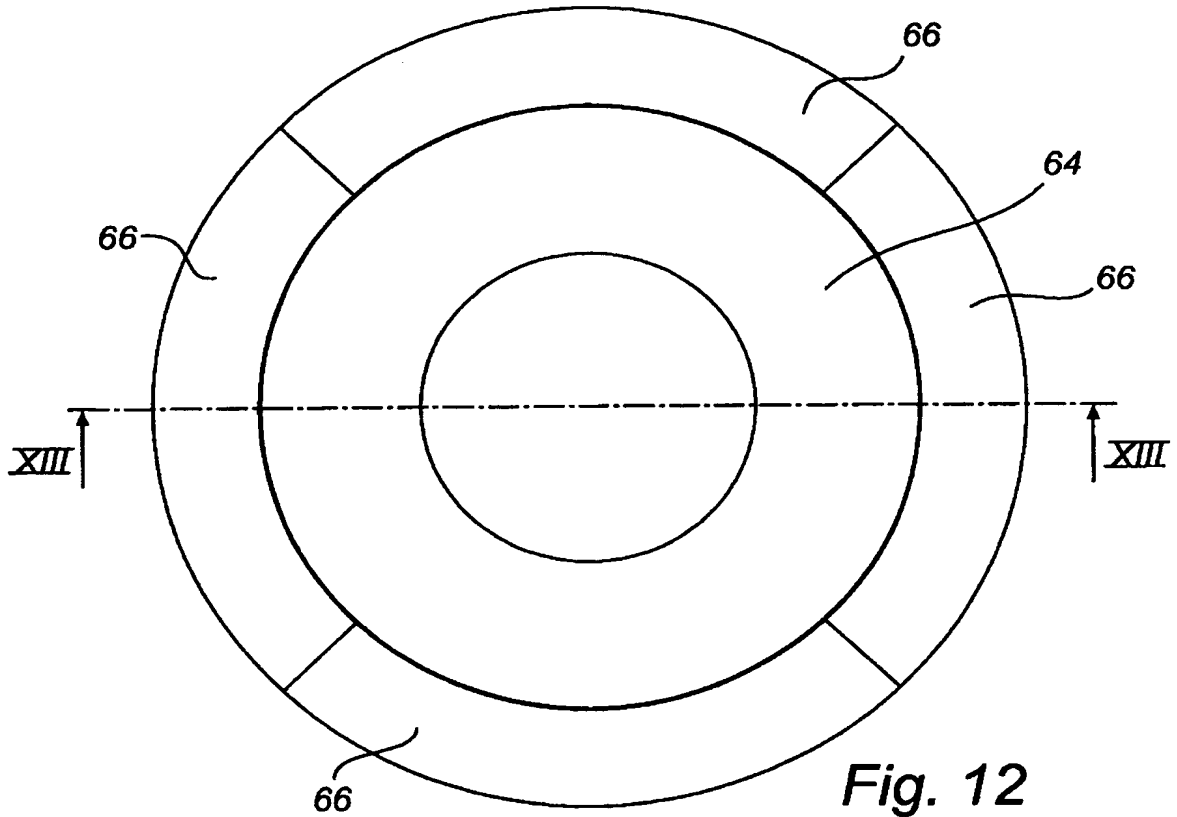


Fig. 12

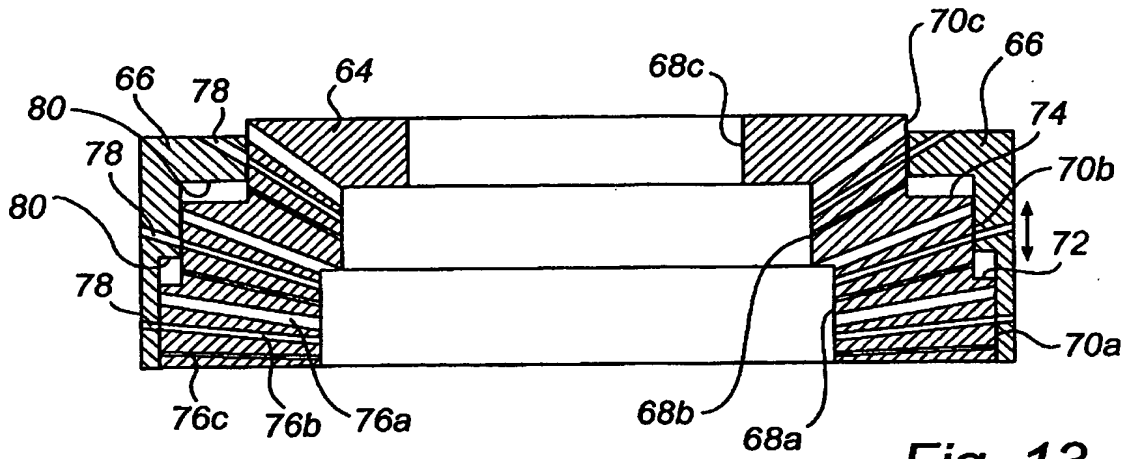


Fig. 13

8/9

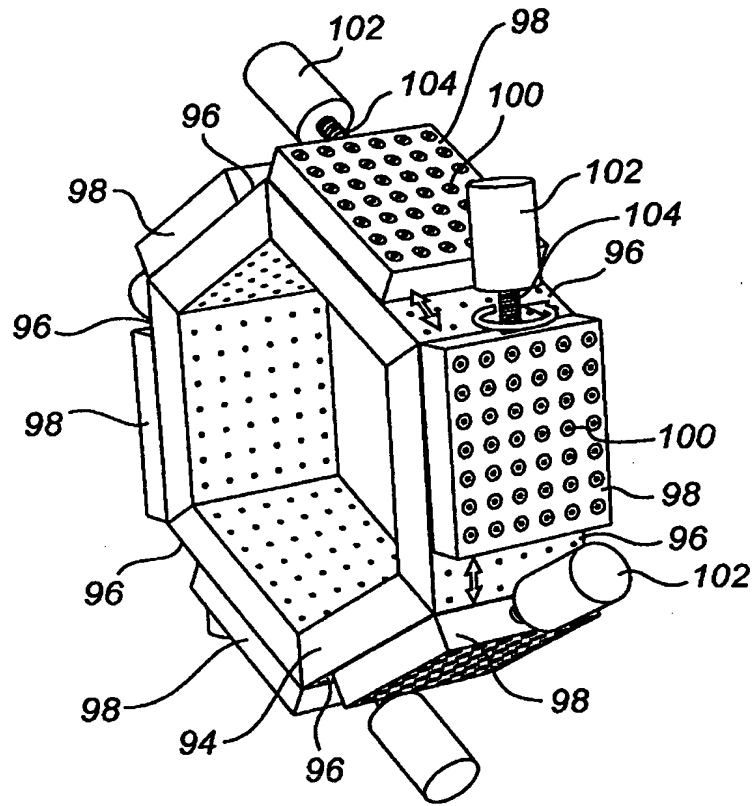


Fig. 14

9/9

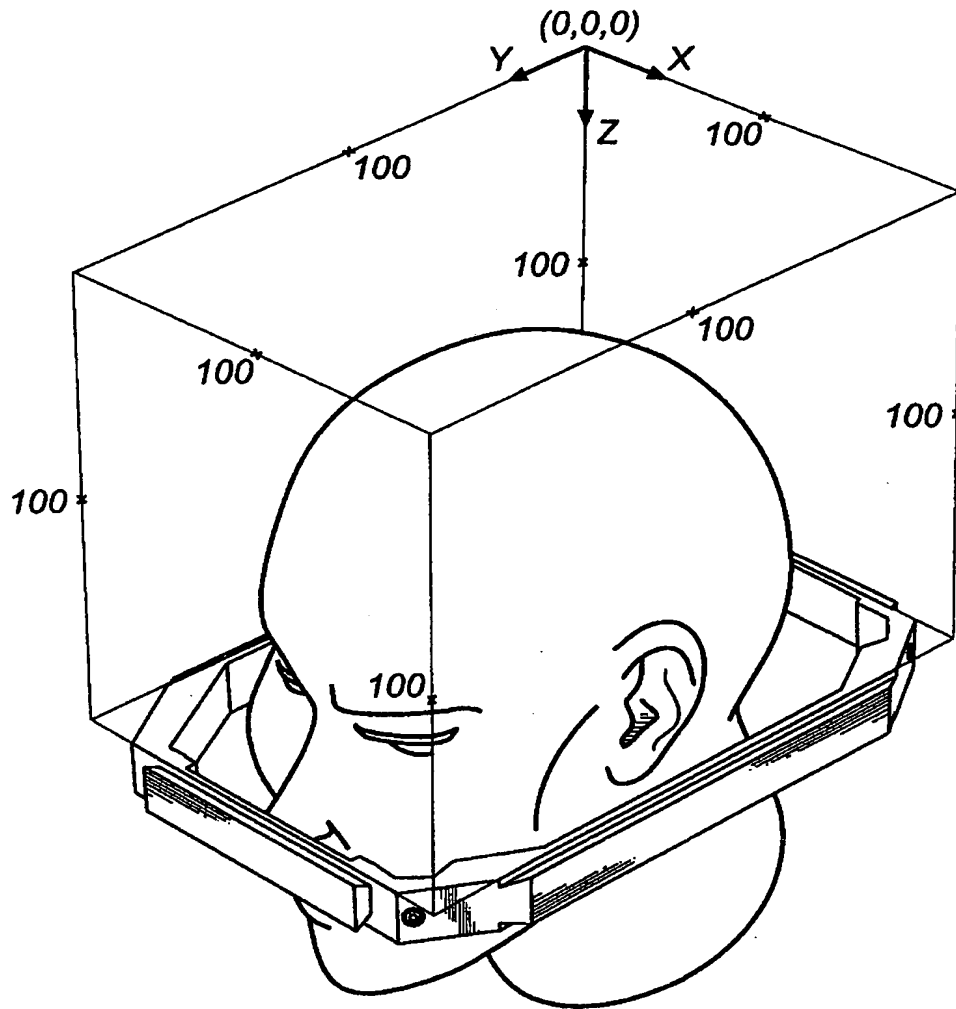


Fig. 15